

SINIAT MIX



DESCRIPTION:

Ready-to-use ultra-light jointing compound in cartridge. Ideal for all works with CREATEX system (perforated plasterboards V edge + profiles + compound + accessories).

PRODUCT BENEFITS


- ▶ Special for CREATEX perforated plasterboards with V edge
- ▶ Easy and fast application
- ▶ Fast drying time
- ▶ Very low shrinkage
- ▶ Extreme white colour

CHARACTERISTICS

Type of mixing	Manual Mechanical
Mixing ratio	Ready to use
Color	Extreme white
Type of application	Manual
Hardening time	12 h to 48 h
Storage time	9 months from the date of production, in the original packaging and kept away from humidity, sun and frost
Consumption	75 ml/m ²
Indicative productivity	300 ml = 4 m ² of CREATEX perforated plasterboards
Reaction to fire	B-s1,d0

APPLICATION

- ▶ Treatment of joints between CREATEX perforated plasterboards
- ▶ Treatment of angles and screw heads
- ▶ Small repairs and patching works
- ▶ Manual application with gun (manual or electric)

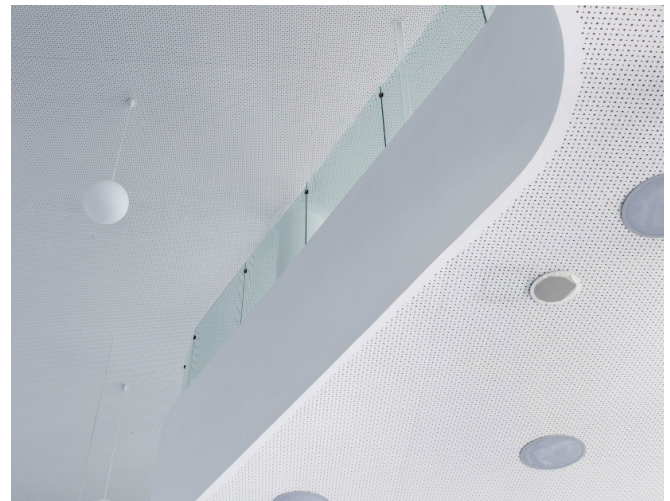

The application must be done according to SINIAT recommendations. System performances are given on an indicative basis, contact SINIAT Technical Service for any check needed. Any change on the commercial reference of system components invalidates the technical and release SINIAT form all responsibility.



Reaction to fire: B-s1,d0

Etex Building Performance S.A.
No. 98 Vulturilor street, Romania
5-6 floor, 030857 Bucharest, district 3
Phone.: (+40) 312 24 01 00
Fax (+40) 312 24 01 01
www.siniat.ro